
S1002 IR sensor switch(door trigger)

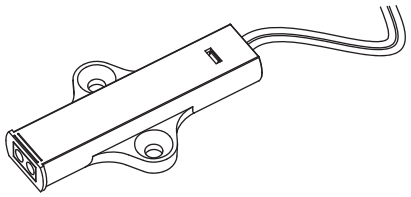

Important safety instructions

1. For indoor use only.
2. Do not disassemble the product.
3. Do not install the switch in water dropping place.

Technical parameters

1. Power supply: DC12V/24V
2. Max switching capacity: 60W
3. Cable length: 1500mm
4. Dust-proof,against solid things and waterproof level: Ip20 (Ref.EN 60529-EN 60598-1)
5. Sensor distance:50mm (Some panel material may shorten the sensor distance, while it will avoid this by sticking the light sensor lable onto the corresponding panel)

Maintenance

1. The external flexible cable or cord of this luminaire cannot be replaced;if the cord is damaged, the luminaire shall be destroyed.Different materials require different types of fittings. Always choose screws and plugs that are specially suited to the material.
2. Use a dry cloth, never a strong cleaning agent.

Installation

Installstion accessories




2X


Light Sensor Label




1X


1. Installation ONE: open a diameter 8mm threaded hole on the roof board,and fixed the switch as following picture. Connect the switch connectors with matched adapter and luminaire connectors on the roof board.

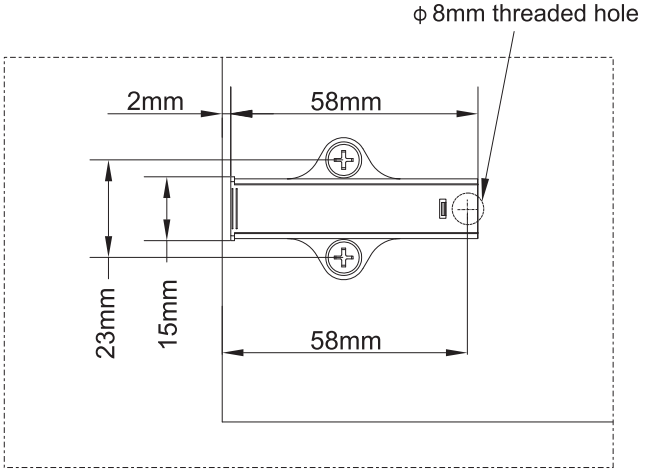

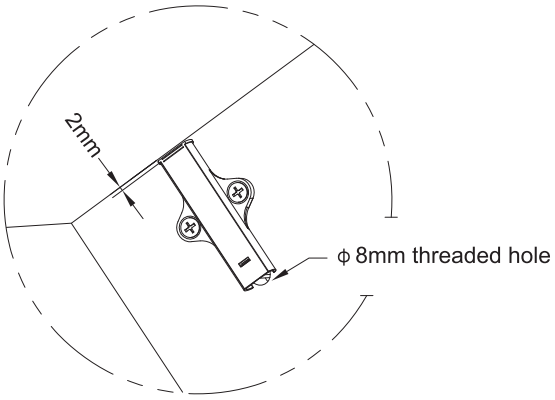

2.Installation TWO: Open cable channel on the roof board as figure piture,fix related length of cable channel base, plug the sensor switch cords through the threaded hole of back board.Then fix sensor switch,install the cover board of the cable channels.

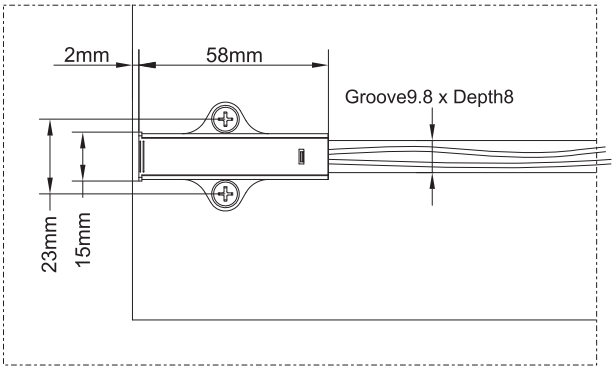

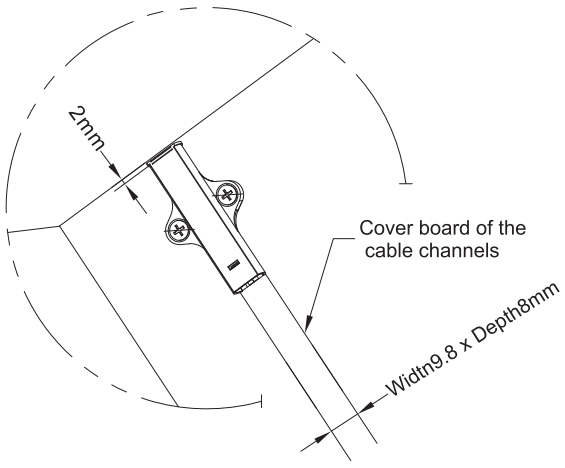

Connecting diagram showing

